




Castor With Screwjack

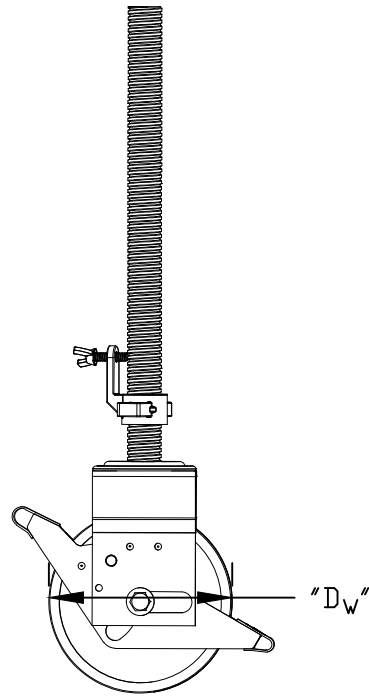

SIDE PROFILE:
A-A

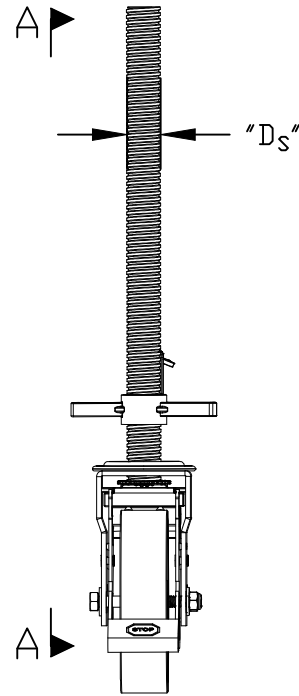

FRONT PROFILE:

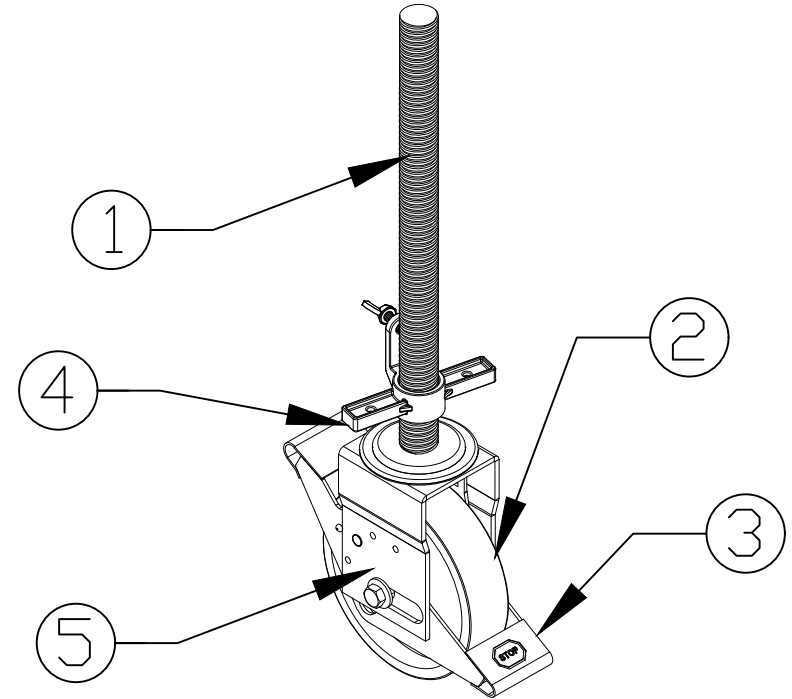

CASTOR WITH SCREWJACK DIAGRAM

NOTES:

1. ABOVE DIAGRAM DEPICTS THE EXACT LAYOUT OF THE CASTOR WITH SCREWJACK
2. RING SYSTEM CASTOR IS USED WITH STANDARDS OR BASECOLLARS BY PLACING THEM WITHIN ON THE THREADED SHAFT [1]
3. "Ds" REPRESENTS THE SHAFT DIAMETER, "Dw" REPRESENTS THE WHEEL DIAMETER

| ITEM NO. | "Ds" | "Dw" | WEIGHT | COMPONENTS | |
|-----------|-------------|--------------|----------|------------|----------------|
| 01CJ8000G | 1.5" [38mm] | 8" [203.6mm] | 6.35 kgs | S.NO. | DESCRIPTION |
| | | | | 1 | THREADED SHAFT |
| | | | | 2 | WHEEL |
| | | | | 3 | BRAKE LEVER |
| | | | | 4 | WING NUT |
| | | | | 5 | CASTOR PLATE |